




INTERIOR DOOR COLLECTION



ATTRIBUTE KEY:

-  Ovolo Sticking
-  Square Sticking
-  Low-E Glass

OPTIONS KEY:

- 6'** 6'8" standard
- 7'** Available in 7'
- 8'** Available in 8'
- SE** Available with Satin Etch Glass


STOCK KEY:

- ON** - Ontario CA
- PH** - Phoenix AZ
- SA** - Sacramento CA


TRADITIONAL | KNOTTY ALDER



33 Flat
ON: 6' 

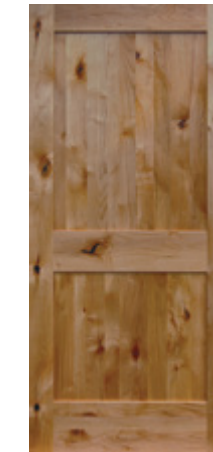

82 Flat
ON: 6' 
PH: 6' 8' 
SA: 6' 8' 

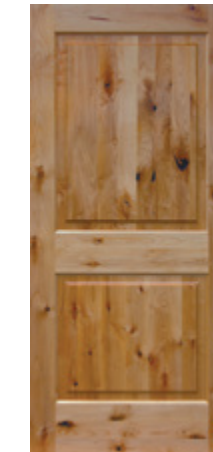

82 Raised
PH: 6' 8' 
SA: 6' 8' 




82 Raised V-Groove
PH: 6' 8' 

TRADITIONAL | ARCH TOP | KNOTTY ALDER



82A Raised
ON: 6' 
PH: 6' 8' 
SA: 6' 8' 

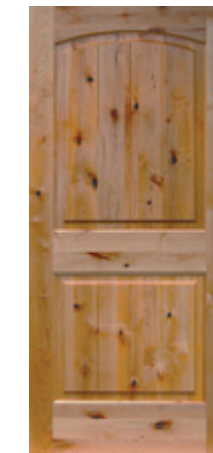

82A Raised V-Groove
PH: 6' 8' 

FRENCH | FIR



1510
ON: 6' 



1501
SA: 6' 

The Finishing Touch

Interior doors help set the tone for your entire home, shaping both its style and atmosphere. Whether you favor modern, clean lines or the inviting warmth of traditional designs, Builders Choice offers a variety of versatile door styles to match your vision. With options designed to fit your taste and budget, you can create a cohesive, welcoming look throughout your space.


TRADITIONAL | FIR



20 Flat
ON: 6' 6"
SA: 6' 6"



82 Flat
ON: 6' 6"
SA: 6' 6"

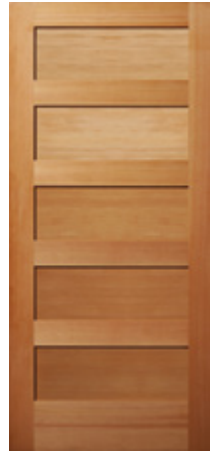




55 Flat
ON: 6' 6"



66 Raised
ON: 6' 6"
SA: 6' 6"




ATTRIBUTE KEY:

-  Ovolo Sticking
-  Square Sticking
-  Low-E Glass

OPTIONS KEY:

-  6' 8" standard
-  Available in 7'
-  Available in 8'
-  Available with Satin Etch Glass

STOCK KEY:

-  ON - Ontario CA
-  PH - Phoenix AZ
-  SA - Sacramento CA



TRADITIONAL | KNOTTY PINE



66 Raised
PH: 6' 6"

Everyday Living

The natural beauty of real wood brings authenticity and warmth to any space. Builders Choice traditional doors in Fir, Knotty Alder and Knotty Pine deliver both charm and performance.

SHAKER | PRIMED



20 | Flat
 ON: 6' 7' 8'
 PH: 6' 8'
 SA: 6' 7' 8'
 *Offered in 1-3/4"
 **Not offered in 1-3/4"



82 | Flat
 ON: 6' 7' 8'
 PH: 6' 8'
 SA: 6' 7' 8'
 *Offered in 1-3/4"
 ** Not offered in 1-3/4"



30 | Flat
 ON: 6' 7' 8'
 PH: 6' 8'
 SA: 6' 8'
 *Offered in 1-3/4"
 ** Not offered in 1-3/4"



33 | Flat
 ON: 6'
 PH: 6'
 SA: 6'
 *Not offered in 1-3/4"



55 | Flat
 ON: 6' 8'
 PH: 6' 8'
 SA: 6' 8'
 *Not offered in 1-3/4"
 **8/0 includes 6 panels

ATTRIBUTE KEY:

- Ovolo Sticking
- Square Sticking
- Low-E Glass

OPTIONS KEY:

- 6' 8" standard
- Available in 7'
- Available in 8'
- Available with Satin Etch Glass

STOCK KEY:

- ON - Ontario CA
- PH - Phoenix AZ
- SA - Sacramento CA




TRADITIONAL | PRIMED



20 | Flat
 ON: 6'
 SA: 6'



82 | Flat
 ON: 6'

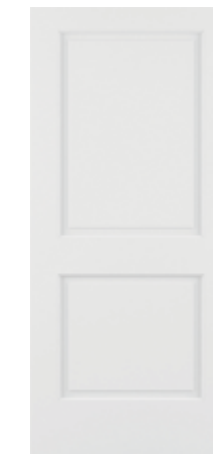


82 | Raised
 ON: 6' 8'
 SA: 6' 8'




30 | Flat
 ON: 6'
 SA: 6'

TRADITIONAL | PRIMED

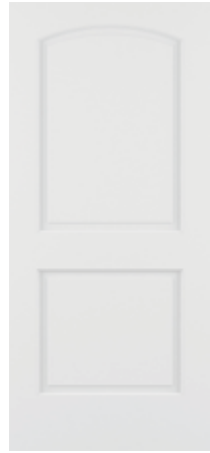

82A | Raised
ON: 6" 8"
SA: 6" 8"

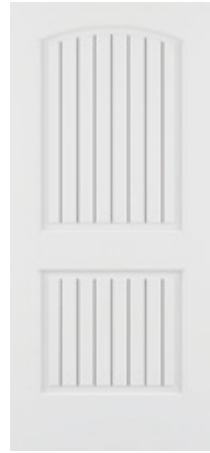

82VA | Raised
ON: 6"



66 | Raised
ON: 6"
SA: 6"



730 | Louver/Louver
ON: 6"
PH: 6"
SA: 6"

ATTRIBUTE KEY:

- Ovolo Sticking
- Square Sticking
- Low-E Glass

OPTIONS KEY:

- 6' 8" standard
- Available in 7'
- Available in 8'
- Available with Satin Etch Glass

STOCK KEY:

- ON - Ontario CA
- PH - Phoenix AZ
- SA - Sacramento CA



CLEAR FRENCH | PRIMED



1501
ON: (6" 8") (8" 10") (7")
PH: (6" 8") (8" 10")
SA: (6" 8") (8" 10")



1510
ON: 6"
PH: 6"
SA: 6"



1512*
PH: 6"
SA: 6"
*8/0 height only

DECORATIVE FRENCH | PRIMED




1501 | Satin Etch
 ON: (6' 0" x 8' 0") (8' 0" x 8' 0")
 PH: (6' 0" x 8' 0") (8' 0" x 8' 0")
 SA: (6' 0" x 8' 0") (8' 0" x 8' 0")



1501 | Pantry (Cursive)
 ON: 6' 0" x 8' 0"
 PH: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"

**Only available in 8/0 includes additional flat panel (not shown)*

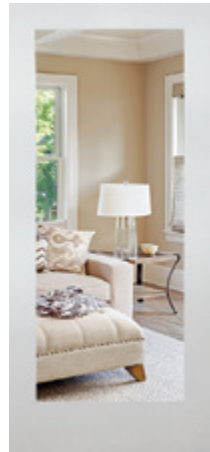

1501 | Mirror
 ON: 6' 0" x 8' 0"
 PH: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"

**8/0 in square or ovolo sticking*



1501 | White Lami
 ON: 6' 0" x 8' 0" x 8' 0"
 PH: 6' 0" x 8' 0" x 8' 0"
 SA: 6' 0" x 8' 0" x 8' 0"

**8/0 in square or ovolo sticking*



1501 | Reeded
 ON: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"

ATTRIBUTE KEY:

- Ovolo Sticking
- Square Sticking
- Low-E Glass

OPTIONS KEY:

- 6' 8" standard
- Available in 7'
- Available in 8'
- Available with Satin Etch Glass

STOCK KEY:

- ON - Ontario CA
- PH - Phoenix AZ
- SA - Sacramento CA



1503 | Satin Etch
 ON: 6' 0" x 8' 0"
 PH: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"



1505 | Satin Etch
 ON: 6' 0" x 8' 0"

**8/0 includes 6 lites (1506)*



Let the Light In

Decorative French doors add brightness and elegance to any room. Choose from clear, satin etch, or specialty glass to create open, airy transitions with refined style.

TRADITIONAL BIFOLDS | PRIMED



20BF | Flat
 ON: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"



82BF | Flat
 ON: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"



30BF | Flat
 ON: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"






730BF | Louver/Louver
 ON: 6' 0" x 8' 0"
 SA: 6' 0" x 8' 0"

BARN DOOR COLLECTION



ATTRIBUTE KEY:

-  Ovolo Sticking
-  Square Sticking
-  Low-E Glass

OPTIONS KEY:

- 6'** 6'8" standard
- 7'** Available in 7'
- 8'** Available in 8'
- SE** Available with Satin Etch Glass

STOCK KEY:

- ON** - Ontario CA
- PH** - Phoenix AZ
- SA** - Sacramento CA

BARN DOOR | PRIMED



1501* | Clear
ON: 6' 8"  
PH: 6' 8"  



1501 | Satin Etch
ON: 5E 6' 8"  
PH: 5E 6' 8"  



1503 | Satin Etch
ON: 5E 6' 8"  
PH: 5E 6' 8"  









1505 | Satin Etch
ON: 5E 6' 8"  
*8/0 includes 6 lites (1506)




20 | Flat
ON: 6' 7" 8"  
PH: 6' 8"  
SA: 6'  







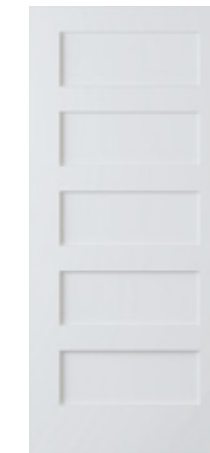

82 | Flat
ON: 6' 7" 8"  
PH: 6' 8"  
SA: 6'  




30 | Flat
ON: 6' 7" 8"  
PH: 6' 8"  
SA: 6' 8"  



55 | Flat
ON: 6' 8"  
PH: 6' 8"  
SA: 6' 8"  
*8/0 includes 6 panels

BARN TRACK HARDWARE KIT


- Carbon steel construction
- Easy installation
- Handle included

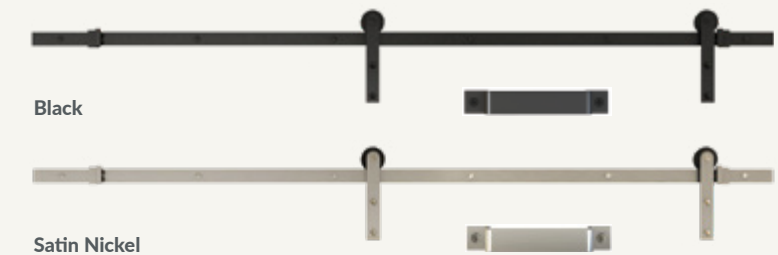

CS CAVITY SLIDER™ COLLECTION



The CS Cavity Slider is a practical solution for those areas where there is not enough space for a swinging door. In addition to its space saving attributes in restrooms, hallways and laundries, it can be used with confidence for architectural feature openings around your project.

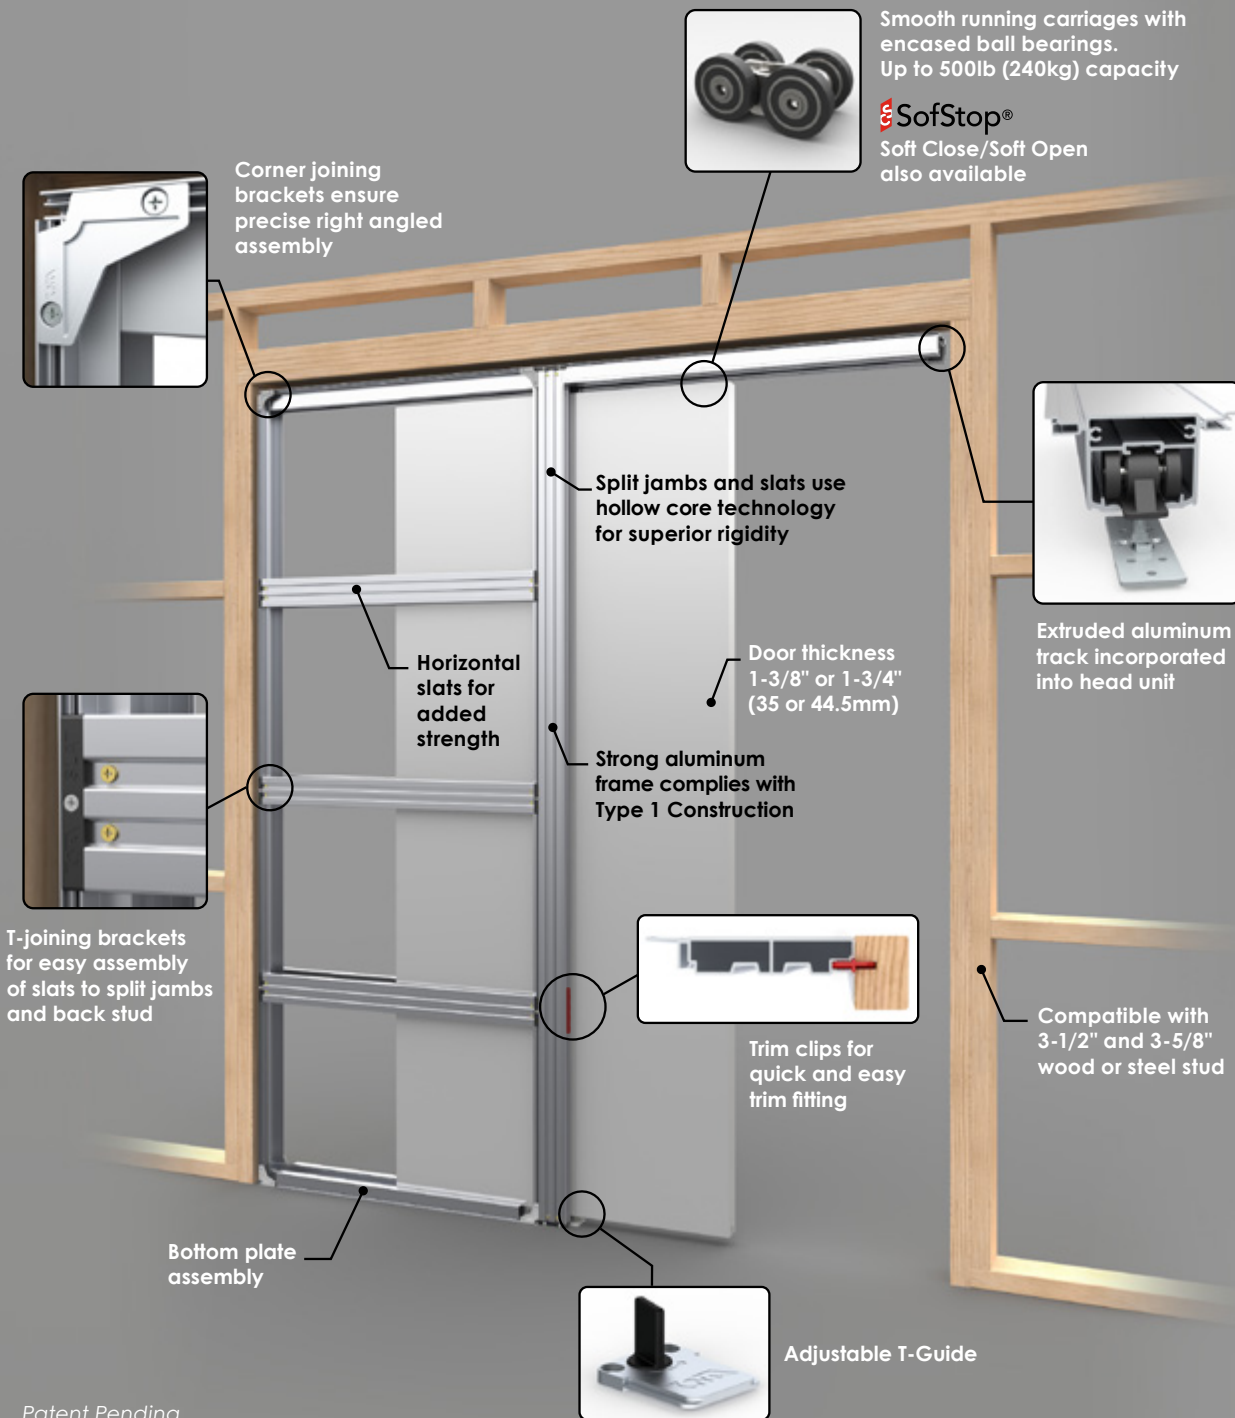

Patent Pending



CL200



CL400

POCKET FRAME SYSTEMS

- Structurally robust due to its construction from aluminum extrusions
- Easy to assemble and install
- Pocket frame accommodates 1-3/8" and 1-3/4" doors up to 4'0" x 8'0" (special order for 9' & 10' available)
- Can be cut down to size on site
- Suitable for residential and commercial projects (meets Type 1 construction code without any combustible materials)



QUALITY SLIDING DOOR HARDWARE


The CL200 is a durable range of sliding door hardware suitable for residential, commercial, and hospitality applications. Privacy handles incorporate a patented magnetic latching system, ensuring a smooth locking action.

STANDARD CL200 RANGE


- Two face plate widths available
- Handles can be adjusted to suit doors from 1-3/8" to 1-1/2" or 1-5/8" to 1-3/4" thick
- Integrated snib button allows more space in side pull
- Handles are not handed
- Easy-to-follow instructions

PREMIUM CL400 MAGNETIC


- Configurations include Passage, Privacy, Bi-Parting and Key Locking
- Door slides flush back into the pocket
- Suits doors from 1-3/8" to 2-1/4" thick
- Available in a range of finishes
- Non-magnetic version available




Satin Nickel



Oil Rubbed Bronze



Matte Black



Bright Chrome



Satin Chrome

CARE & FINISHING AND WARRANTY

HANDLING & STORAGE

- Deliver doors in a clean truck and under cover.
- Do not deliver or install doors until foundations, concrete floors, and plaster or texture walls are completely dry.
- Allow doors time to acclimate to the conditions at the job site prior to installation.
- Never subject doors to abnormal heat, dryness or humidity for prolonged periods (i.e. forced heat).
- Store doors lying flat on a level surface above the ground in a dry, well-ventilated building and keep covered. Don't stack doors on end. If the doors are to be stored on the job site, the entire door including top and bottom edges must be sealed with a clear or pigmented based sealer to prevent moisture absorption. All six sides of the door must be properly sealed including all edges of any cut openings (speak easy, mail slot, pet door, vent, peep site, etc.) for warranty to apply.
- To keep doors protected, use clean gloves and equipment. Cover doors, but allow for air circulation. Carry, do not drag doors over any surface.

Important Note: Panels of stile and rail doors are engineered to float so they can move with changes in climate without causing stress. Make sure these components are aligned before finishing. You can correct alignment by carefully moving the panel with a wood block, rubber mallet, and a soft touch. Components that have shifted and must be aligned are not considered "defects" according to the warranty.

FITTING & HANGING

- When hanging a door, allow adequate clearance for swelling of door and frame in extremely damp weather.
- Use designated sizes to avoid cutting door width. For trimming ends, we recommend a sharp, fine-tooth saw.
- Be careful not to impair structural strength of door when fitting hardware or special features.
- To prevent distortion, set hinges in straight line. Use three hinges on doors 7' or less; four hinges on doors over 7' high. Jambs and stops must be square and plumb.
- Protect outward swinging doors that are exposed to the elements. An adequate overhang is strongly recommended for exterior doors. A general rule of thumb for an overhang is to measure height from porch to overhang and divide the distance in half. That measurement would be a minimum overhang width recommended.
- Immediately after fitting or cutting, and prior to weatherstripping and hanging any door, give the entire surface (including all edges) two coats of paint/stain, varnish or a quality sealer to prevent moisture absorption.
- To minimize heat loss and reduce energy costs, use any good weatherstrip on exterior doors.
- Damage incurred due to extreme temperature build-up when a storm door is used is not considered a defect.

Important Note: OrePac reserves the right to make product improvement changes in specifications, materials and construction details.



PREPARATION & FINISHING

- Inspect door carefully for defects before finishing.
- All wood doors supplied by OrePac require sanding and prep prior to finish. The amount of sanding will depend on the expected appearance after finish.
- Remove all dust with a tack cloth before beginning to apply finish.
- Hang the door prior to finishing, then remove to finish properly.
- Apply finish to the door immediately after fitting and hanging, but never during or immediately after high periods of moisture.
- The door should be finished while lying flat for maximum performance of finishing.
- Use solvent-based paints, sealers and stains, or when applicable, high quality water-based paints or stains, and follow the paint/stain manufacturer's directions. Apply finish to all surfaces including top and bottom edges, and the edges of all cut openings (speak easy, mail slot, vent, pet door, peep site, etc.). Dark color finishes should not be used on doors exposed to prolonged direct sunlight. The heat buildup may cause warping, veneer checks or separation.
- To stain the door: Apply a stain and sealer combination as recommended by the paint/stain manufacturer for the type of application (either exterior or interior). The stain or sealer combination will stain the door and seal the surface. Apply three coats of clear top coat, such as varnish or polyurethane. Sand lightly between coats.
- All exteriors must have ultra violet (UV) inhibitors in the finish. Do not use solid-based stains as the final finish. These finishes must have three coats of varnish or polyurethane as final top coat.
- **To paint the door:** Use a quality solvent-based primer, followed by three coats of a good exterior paint recommended by the paint/stain manufacturer to be compatible with the primer. When finishing glazed doors, apply top coats generously to bridge wood and glass. To protect against moisture, lap paint onto glass 1/16 inch. For interior applications, use a quality interior primer followed by two coats of interior latex enamel or solvent-based paint. The door manufacturer and distributor are not responsible for the final appearance of doors finished in the field. It is expected that the contractor will make adjustments as needed to achieve the desired results.
- All finishes will last longer when protected from the direct sun and rain by an overhang or porch. If the door is exposed to the elements, a fine bead of silicone caulk should be used between the glass and sticking or panel and sticking on the door's exterior.

ONE-YEAR EXTERIOR DOOR WARRANTY

Doors used in an exterior application (with controlled climate conditions on one side) shall carry a one-year limited warranty from the date of purchase from the dealer. This warranty applies only to doors that have been properly finished, sealed, and hung in a location protected from direct exposure to sun and rain, under normal conditions. For more details please refer to the Wood Door Installation Guide.


FIVE-YEAR INTERIOR DOOR WARRANTY

Doors used in an interior application (with controlled climate conditions on both sides) shall carry a five-year limited warranty from the date of purchase from the dealer. This warranty applies only to doors that have been properly finished, sealed, and hung. The five-year warranty applies only to the original homeowner and is not transferable.

OrePac warrants each door is made of quality materials and workmanship, free from defects that make it unfit for normal use.

DETERMINING ADEQUATE OVERHANG

To determine if your door has adequate overhang, measure up from the bottom of the door to the ceiling and divide that distance by two. The resulting number will be the minimum allowable overhang. If you have a western or southern exposure, you may still receive direct sunlight on the door and a larger overhang will be required.

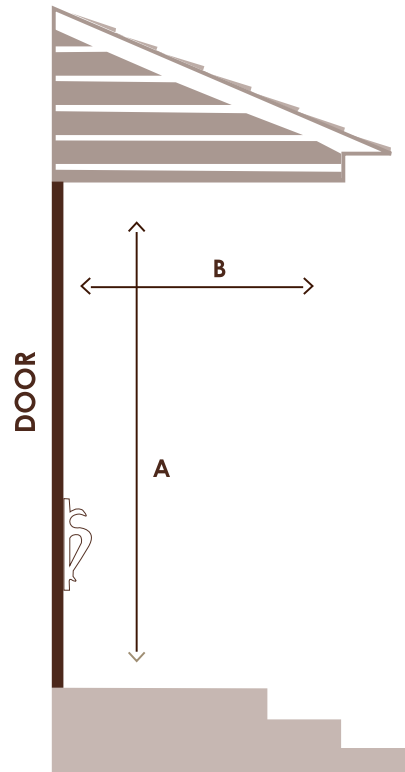

A Distance from the bottom of the door to the ceiling

B The amount of overhang protection required



CHARACTERISTICS EXCLUDED FROM WARRANTIES

The following are not defects in the workmanship or material and are not covered by this written warranty:

1. Damage caused by failure to comply with the "Care & Finishing" instructions.
2. Warp of less than or equal to 1/4" in the plane of any door 3' x 7' or smaller.
3. Defect caused by a warped or bowed jamb/frame unit or improper installation.
4. Natural variations in the color or texture of the wood.
5. Failure to properly seal and maintain the integrity of the door finish. All six sides, and the edges of any cut openings (speak easy, mail slot, pet door, vent, peep site, etc.) must be sealed immediately after fitting and hanging.
6. Panel misalignment or shrinkage.
7. Rail expansion due to climate conditions.
8. Damage caused by extreme temperature build-up where a storm door is utilized.
9. Failure to perform normal homeowner's maintenance, including but not limited to, reapplying topcoat on a yearly basis.
10. The performance or appearance of finishes applied.

LIMITATION OF LIABILITY

The liability of OrePac is expressly limited to the replacement or repair of the door or a refund, in full, of the original purchase price. OrePac shall not be liable for any special, consequential indirect or incidental damages based upon breach of express or implied warranty, breach of contract, negligence, strict tort or any loss of profits, loss of savings or revenue, loss of use of the door or structure in which the door is installed, cost of any substitute doors, claims by third parties including subsequent purchasers of OrePac's products and injury to property.

This warranty gives you specific legal rights and you may have other rights which vary from state to state.

Additional warranty details and restrictions are available through your OrePac representative.